

Appendix V Cross-Section Options Considered

Existing Belfountain Old Main Street (10-20 m Typical ROW)

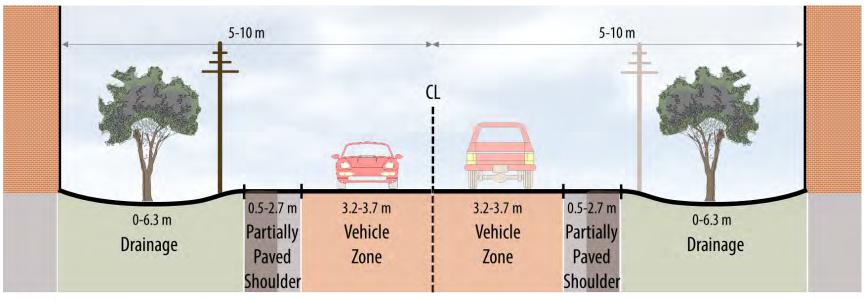


Note: Total right-of-way is predominantly 20 m; paved portion of shoulder ranges from 0.2-2.0 m; majority of above ground utilities run on one side of the road and cross over between sides

Existing Mississauga Road (20-28 m Typical ROW)

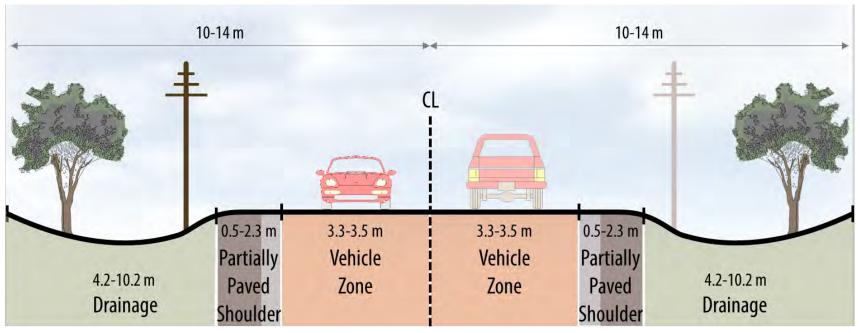


Note: Total right-of-way is predominantly 20 m; paved portion of shoulder ranges from 0-2.3 m; majority of above ground utilities run on one side of the road and crosses over between sides

Existing Bush Street (20-45 m Typical ROW)

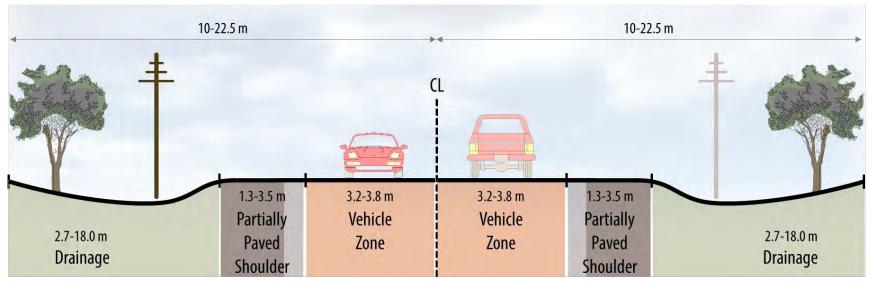


Note: Total right-of-way is predominantly 30 m; paved portion of shoulder ranges from 0.2-1.5 m; majority of above ground utilities run on north side of the road and crosses over between sides

Existing Winston Churchill Boulevard (20-28 m Typical ROW)

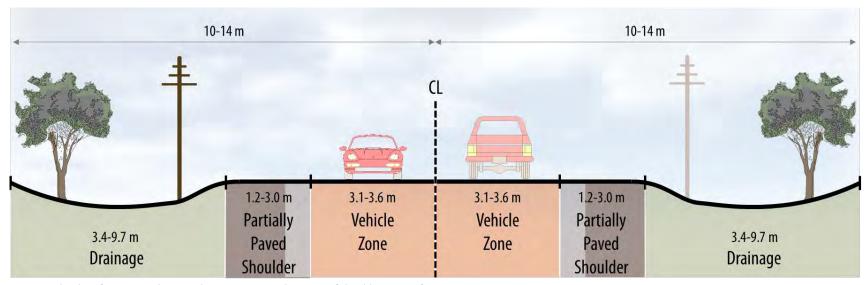


Note: Total right-of-way is predominantly 20-23 m; paved portion of shoulder ranges from 0-1.0 m; majority of above ground utilities run on east side of the road and crosses over between sides

Existing Olde Base Line Road (20-33 m Typical ROW)

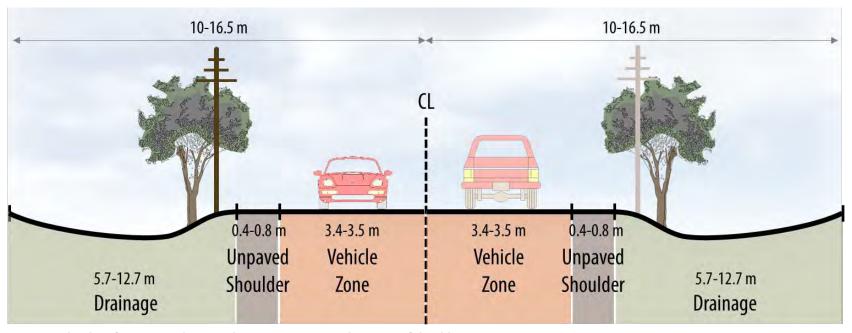

Note: Total right-of-way is predominantly 20-25 m; no paved portion of shoulder exists; majority of above ground utilities run on one side of the road and cross over between sides


14m Platform Rural Road (30m Typical ROW, Paved Shoulder and Buffer)

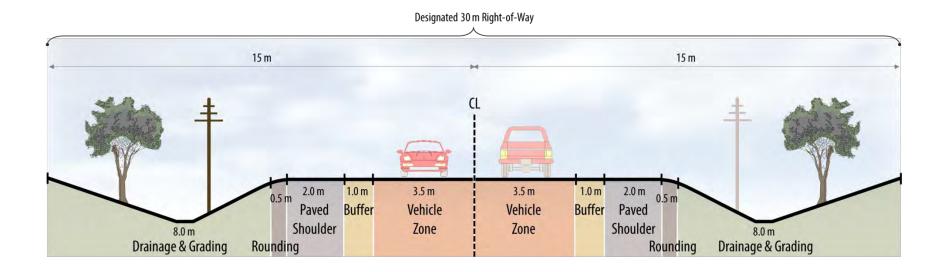

Mississauga Rd./Old Main St., Bush St., Olde Base Line Rd., and Winston Churchill Blvd. EA Cross-Section Options Considered


11.4m Platform Rural Road (30m Typical ROW, Paved Shoulder)

Proposed for parts of Winston Churchill Boulevard, Olde Base Line Road, and Bush Street

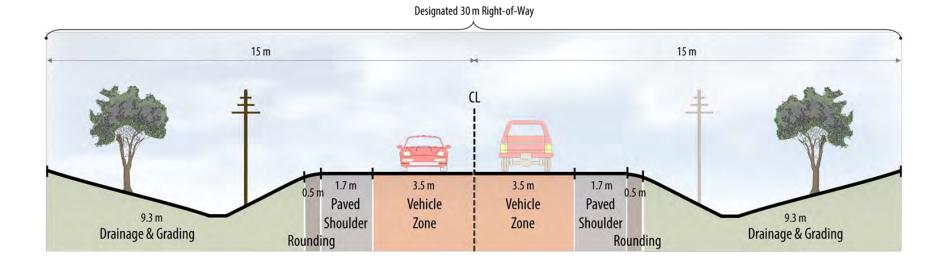


11.4m Platform Rural Road (23m Typical ROW, Paved Shoulder and Minimum Drainage/Grading)


Proposed for parts of Winston Churchill Boulevard, Olde Base Line Road, and Bush Street

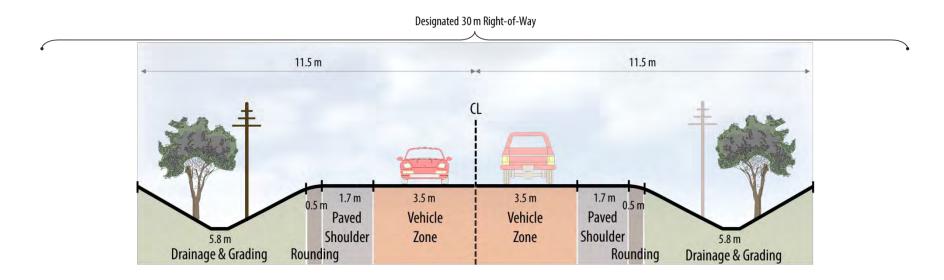

10m Platform Rural Road (20m Typical ROW, No Buffer and Minimal Shoulder and Drainage/Grading)

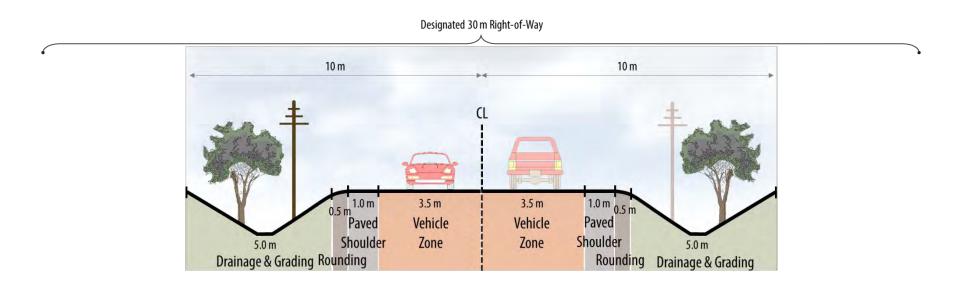


13m Platform Semi-Rural Road (20m Typical ROW, Wide Paved Shoulder and Mountable Curb)

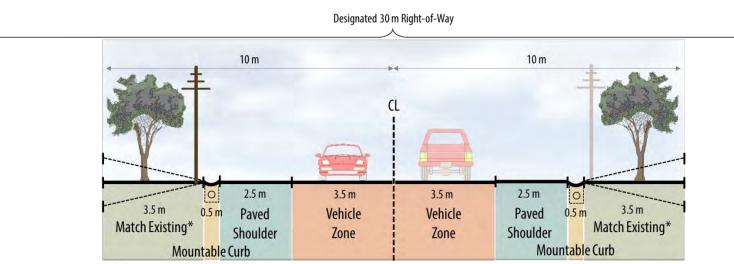


11.4m Platform Semi-Rural Road (20 m Typical ROW, Paved Shoulder and Mountable Curb)


Proposed for parts of Winston Churchill Boulevard, Olde Base Line Road, and Mississauga Road/Old Main Street

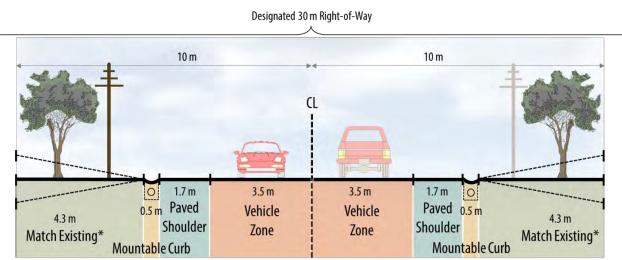


10m Platform Semi-Rural Road (20 m Typical ROW, Grass Boulevard and Mountable Curb)

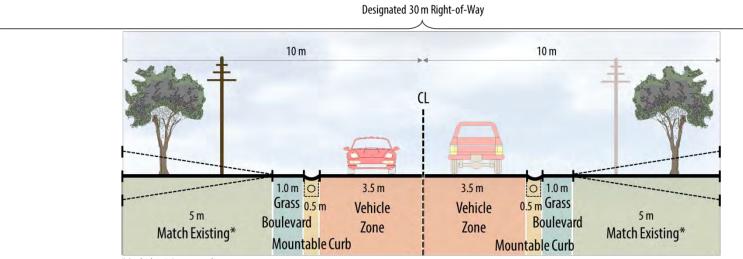


Road Characterization Study Rural Main Street (20 m Typical ROW)

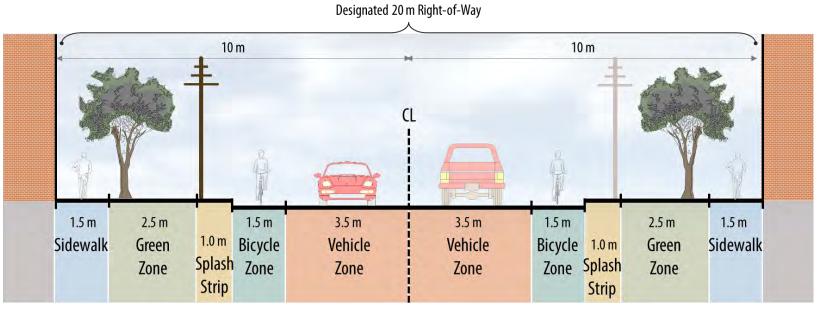


Rural Main Street (15-20 m Typical ROW – Variable Green Zone Width)

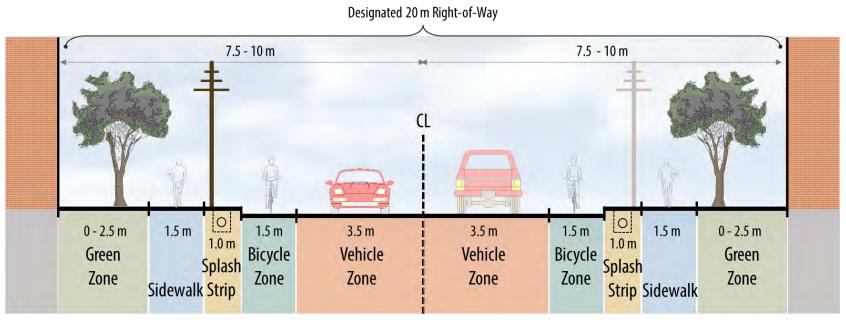


Rural Main Street with Parking (15.5-20 m Typical ROW – Parking, Sidewalk and Multi-Use Trail with Variable Green Zone Width)

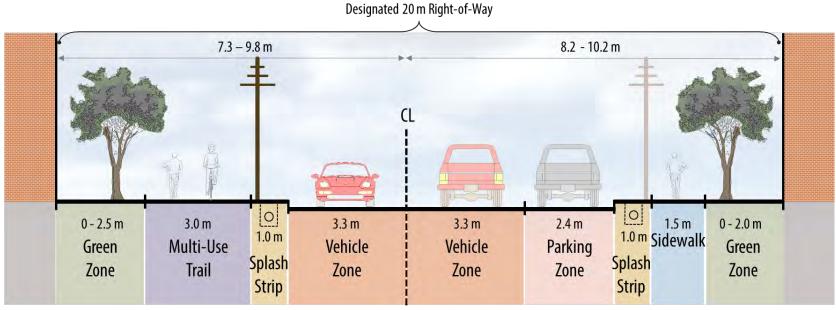


Constrained Rural Main Street 2 (9.5 – 12.8 m Typical ROW Variable Multi-Use Trail and Green Zone Widths)

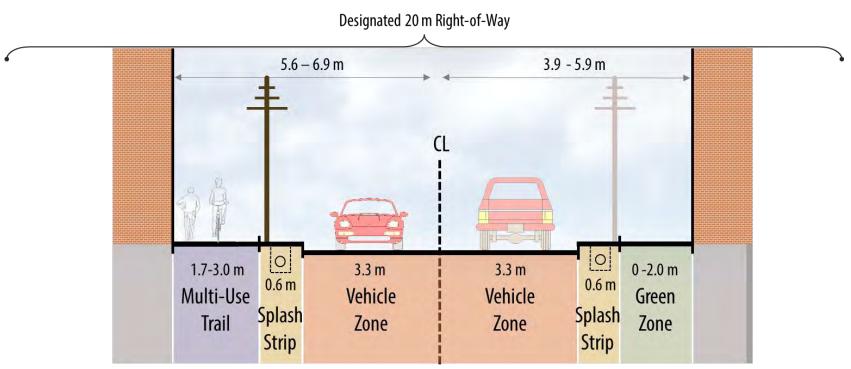

Constrained Rural Main Street (10.6 m Platform/Typical ROW – Multi-Use Trail and Mountable Curb)

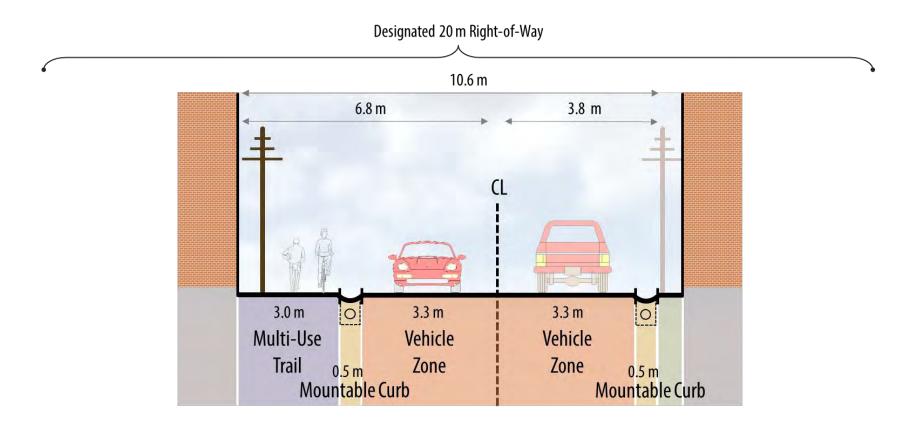

Constrained Rural Main Street (11.7 m Platform/Typical ROW – Parking and Narrow Sidewalk)

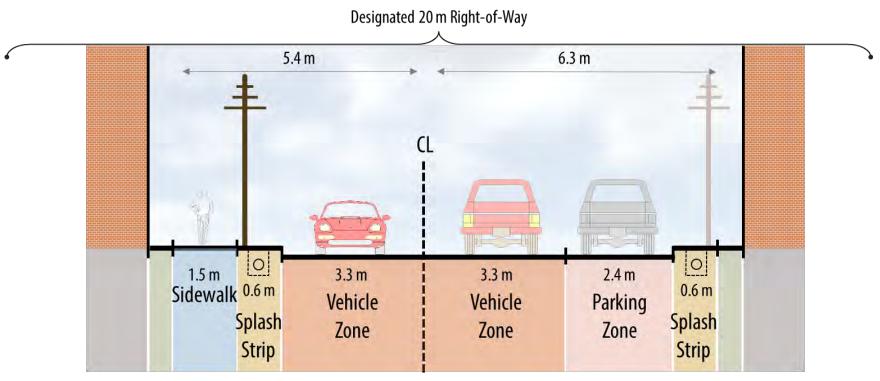


Constrained Rural Main Street (12 m Typical ROW – Parking and Narrow Buffer)


Designated 20 m Right-of-Way 12.0 m 5.2 m 6.8 m 0 0.5 m 0.6 m Buffer 2.4 m 3.3 m 3.3 m 0.6 m 0.5 m **Parking** Vehicle Vehicle Splash Green Green Splash Zone Zone Zone Strip Strip Zone

Constrained Rural Main Street (11.7 m Platform/Typical ROW – Parking, Sidewalk and Mountable Curb)

Proposed for Old Main Street between Bush Street and Belfountain Community Centre

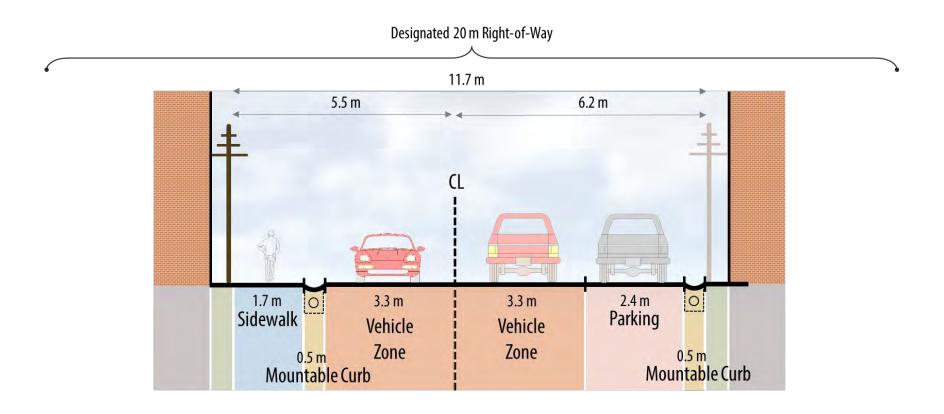


Constrained Rural Main Street (13.3 m Typical ROW – Wide Paved Shoulder on Both Sides)

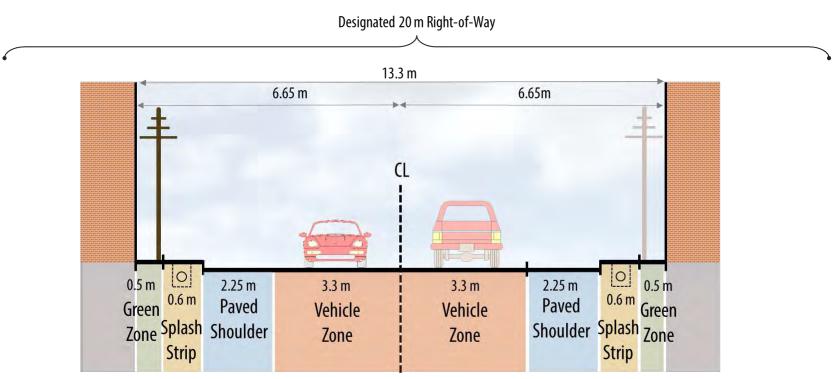


Constrained Rural Main Street (12 m Typical ROW – Paved Shoulder on Both Sides)

Designated 20 m Right-of-Way

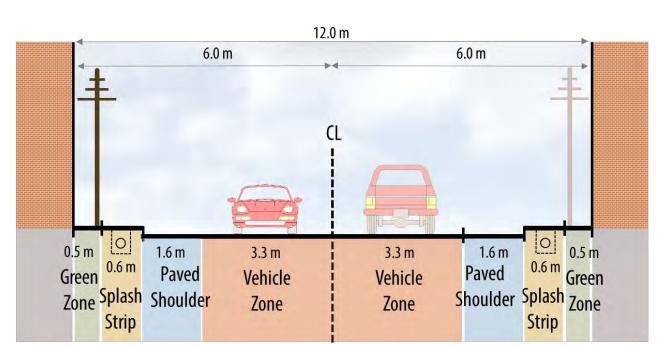

Constrained Rural Main Street (12 m Typical ROW – Sidewalk on Both Sides)

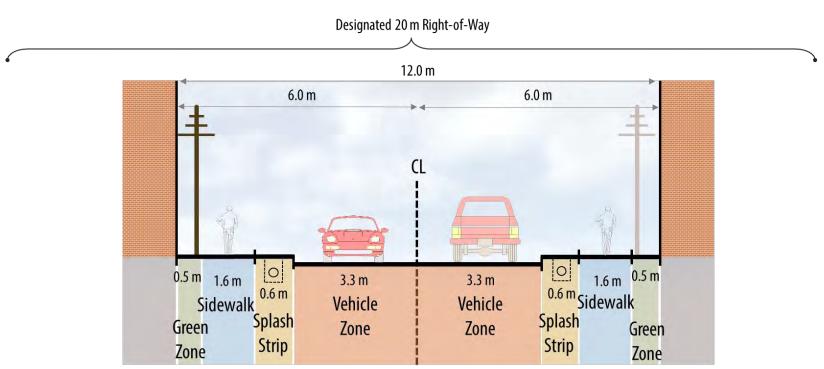


Constrained Rural Main Street (10.5m Typical ROW – Sidewalk on One Side)

Designated 20 m Right-of-Way 10.5 m 6.1 m 4.4 m CL 0 0.5 m 3.3 m 3.3 m 0.6 m Green 0.6 m Green Vehicle Vehicle Splash Zone Zone 1.7 m Splash Zone Zone Sidewalk Strip Strip


Constrained Rural Main Street (9.3 m Platform with Sidewalk on one side and Mountable Curb)

Proposed for Bush Street between Shaws Creek Road and Old Main Street

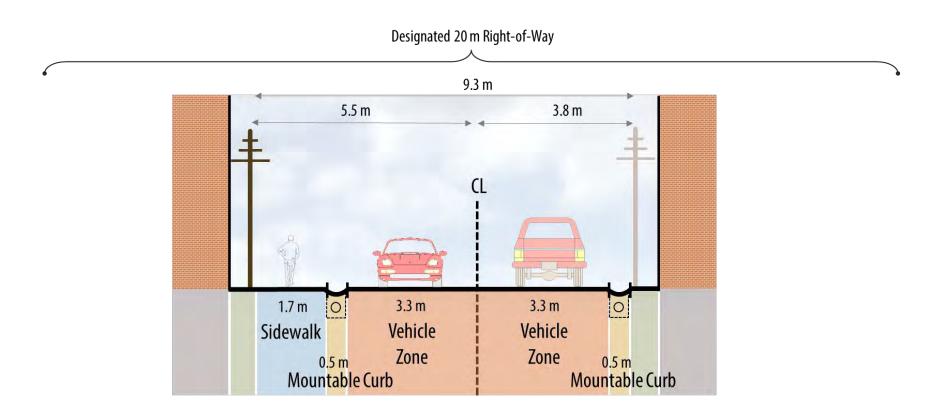


Constrained Rural Main Street (9.3 m Platform with Paved Shoulder on one side and Mountable Curb)

Proposed for Old Main Street between Belfountain Community Centre and north/west of Caledon Mountain Drive

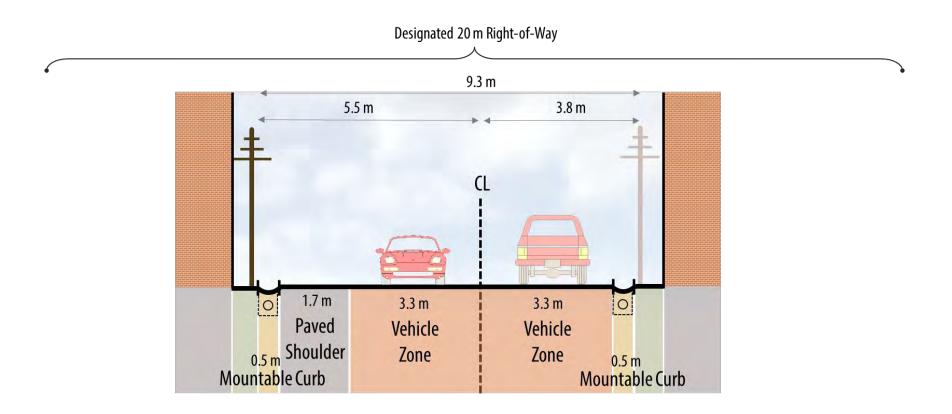


Constrained Rural Main Street (10.5m Typical ROW – Narrow Paved Buffer on Both Sides)

Designated 20 m Right-of-Way

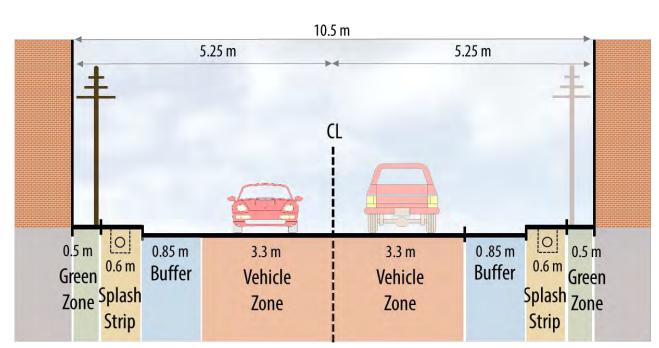


Constrained Rural Main Street (9.3m Platform – Narrow Paved Buffer on Both Sides, Mountable Curb and No Green Zone)



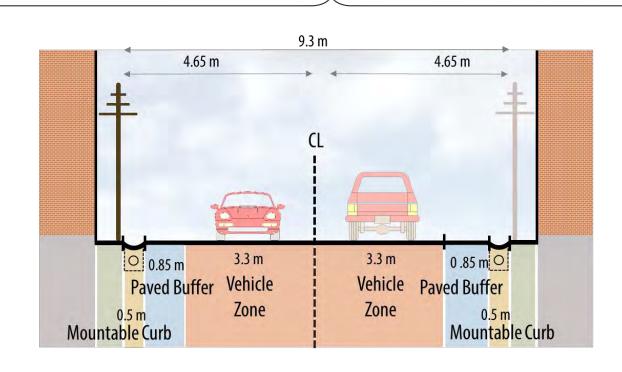


Constrained Rural Main Street (9.0 m Typical ROW – Narrow Paved Buffer on One Side and Minimal Green Zone)


Designated 20 m Right-of-Way

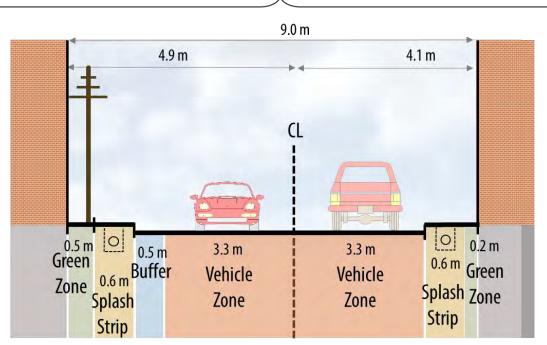

Constrained Rural Main Street (9.0 m Typical ROW – Minimal Paved Buffer on Both Sides and Minimal Green Zone)

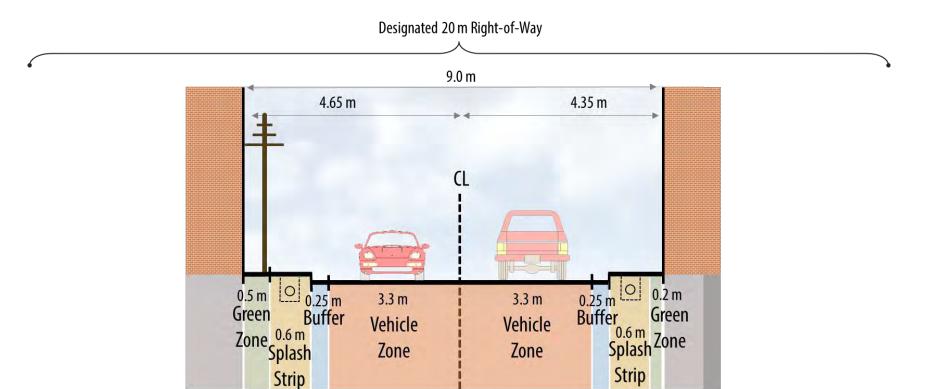

Constrained Rural Main Street (8.0 m Platform – Narrow Paved Shoulder on Both Sudes, Existing Splash Strip on One Side and No Green Zone)

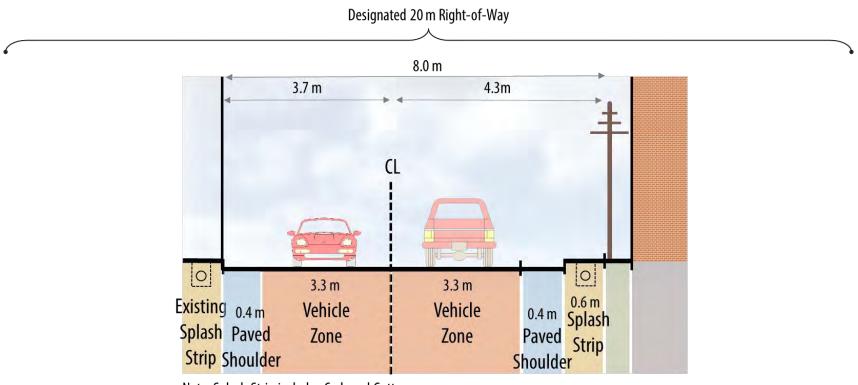

Constrained Rural Main Street (7.8 m ROW – Vehicle Zone and Splash Strip Only)

